

Silver fox -New indexable drills for shallow holes

1 Internal coolant hose connector, which is used in lathe.

2 New tool body material with greatly improved tool rigidity.

3 Tool body with specially treated coating for superior lubricating performance.

4 Optimized structure for better chip breaking, lower vibration during cutting, higher machining precision.

5 Extremely large chip pocket, innovative liquid angle, for smoother chip evacuation.

Innovative technology
fully upgrading



Optimized flutes and double spiraled internal coolant holes for high efficient drilling.

Case

Tool applied ZTD04-260-XP25-SP07-02
 Insert applied SPGT07T308-PM /YBG205(Peripheral edge)
 SPGT07T308-PM /YBG212(Inner edge)
 Workpiece material 50Mn(HB240)
 Cooling system Double helical internal cooling
 Cutting parameters $V_c=130\text{m/min}$ $f=210\text{mm/min}$ $a_p=90\text{mm}$





Machining situation

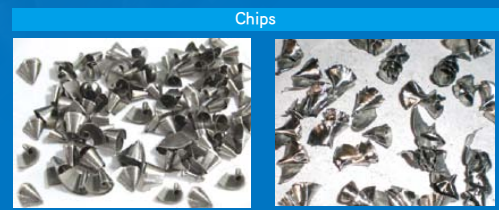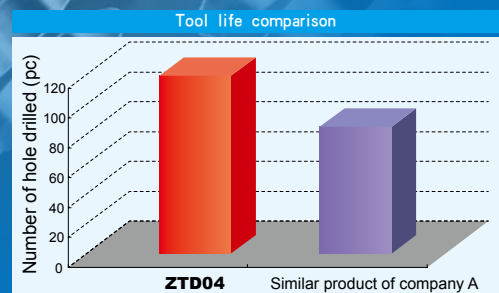


ZTD04-260-XP25-SP07-02

Similar product of company A

- Optimized cutting edge design ensures more stable cutting and better chip breaking.
- Meeting the requirements of central edge and peripheral edge with economy and efficiency.
- Perfect combination of grade and chipbreaker solves all your difficulties in machining.

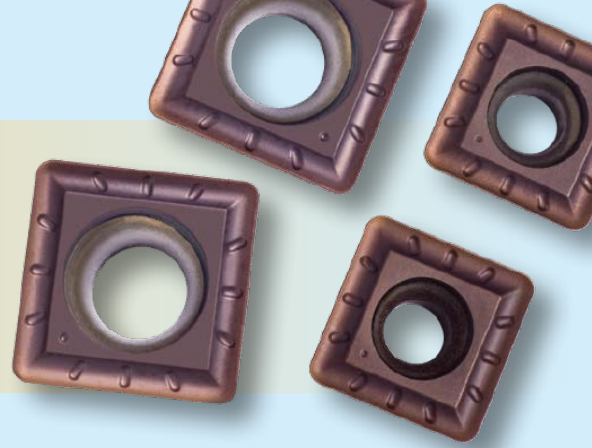

Inner edge insert




YBG212

YBG212

- Special coating technology makes insert surface smooth, reducing friction and ensuring unobstructed chip flow.
- Unique nano coating, stronger combination of substrate and highly wear-resistant TiAlN coating, higher toughness and hardness.
- Good thermal stability and chemical stability of coating provide more effective protection for the cutting edge.
- Ultra-fine solid carbide substrate with high toughness ensures high strength of cutting edge.



Peripheral edge insert



YBG205




YBG205

- Ultra-fine TiAlN base nano coating added with wear-resistant and heat-resistant rare elements greatly improves over-all properties.
- Special coating technology ensures stronger combination of substrate and coating.
- Thin PVD coating, sharp cutting edge.
- Fine grain WC base solid carbide with high hardness and high toughness.
- Special surface treatment after coating improves surface finish while eliminating harmful stress.





Because of the low speed of inner edge and the poor working condition, there is high requirement for insert toughness. Therefore, YBG212 with good over-all properties is recommended for inner edge and YBG205 with high wear resistance for peripheral edge.

Case


Workpiece		Cooling system	Double helical internal cooling	
		Insert applied	SPGT07T308-PM/YBG205	Similar product of company A
Workpiece material	42CrMo (HRC25)	Comparison of insert abrasion (after 15 minutes of machining)		
Cutting parameters	$V_c=150\text{m/min}$ $f_r=0.12\text{mm/r}$ $a_p=80\text{mm}$			




If stationary drilling method is used, the small ejected discs may lead to accidents when workpiece is drilled through, so please see to it that the machine has adequate safety measurements.

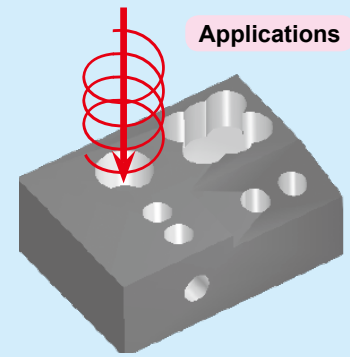


1 Common drilling



2 inclined face drilling



3 Cross-hole drilling



4 Counter boring

Safety information

Breakage


Chipping on cutting edges can be caused by various conditions:

- Off-center drill.
- Tool overhang or feed rate is too large.
- Incorrect inserts seating, tip seat was damaged.
- Poor insert stability.
- Insufficient coolant supply.
- Incorrect insert chipbreaker or grade.

Insert abrasion

The two most common types of insert abrasion are flank and crater abrasion. The flank abrasion is generally natural abrasion, especially on the peripheral insert which is applied with higher cutting speed. However, this abrasion will finally result that the insert cutting edge cannot achieve the tolerance and/or surface quality required for the machining.

In drilling operations, if flank and crater abrasion exceed certain values, the inserts should be changed without delay for production security.

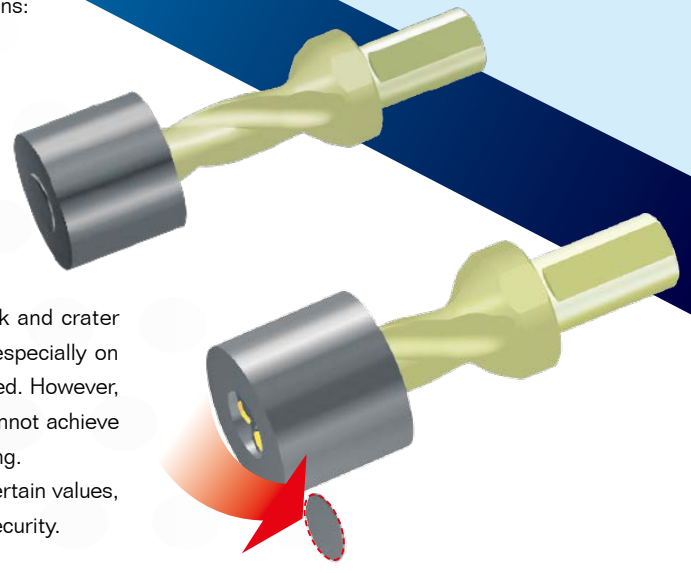




Indexable shallow drills

Indexable shallow drills

ZTD02 2D

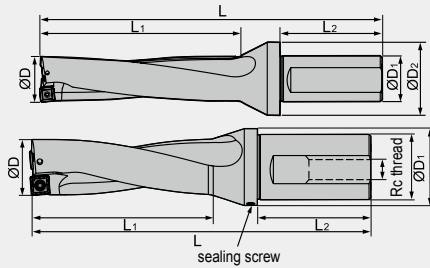

Picture 1

Picture 2


Type	Stock	Basic dimension(mm)						Applicable inserts	Insert screw	wrench	sealing screw	Rc thread	style
		ØD	ØD1	ØD2	L1	L2	L						
ZTD02-130-XP20-SP05-02	▲	13	20	25	31	50	98	SPGT050204-PM/EM	I60M2×4.3	WT06IP			
ZTD02-140-XP20-SP05-02	▲	14	20	25	33	50	100	SPGT050204-PM/EM	I60M2×4.3	WT06IP			
ZTD02-150-XP20-SP05-02	▲	15	20	25	35	50	102	SPGT050204-PM/EM	I60M2×4.3	WT06IP			
ZTD02-160-XP20-SP05-02	▲	16	20	25	37	50	104	SPGT050204-PM/EM	I60M2×4.3	WT06IP			
ZTD02-170-XP25-SP06-02	▲	17	25	32	39	56	117	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD02-180-XP25-SP06-02	▲	18	25	32	41	56	119	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD02-190-XP25-SP06-02	▲	19	25	32	43	56	121	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD02-200-XP25-SP06-02	▲	20	25	32	45	56	123	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD02-210-XP25-SP06-02	▲	21	25	32	47	56	125	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD02-220-XP25-SP07-02	▲	22	25	32	49	56	127	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD02-230-XP25-SP07-02	▲	23	25	32	51	56	129	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP	---	---	Picture 1
ZTD02-240-XP25-SP07-02	▲	24	25	32	53	56	131	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD02-250-XP25-SP07-02	▲	25	25	32	55	56	133	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD02-260-XP25-SP07-02	▲	26	25	32	57	56	135	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD02-270-XP25-SP07-02	▲	27	25	32	59	56	137	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD02-280-XP32-SP09-02	▲	28	32	37	61	60	146	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD02-290-XP32-SP09-02	▲	29	32	37	63	60	148	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD02-300-XP32-SP09-02	▲	30	32	37	65	60	150	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD02-310-XP32-SP09-02	▲	31	32	37	67	60	152	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD02-320-XP32-SP09-02	▲	32	32	37	69	60	154	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD02-330-XP32-SP09-02	▲	33	32	37	71	60	156	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD02-340-XP40-SP11-02	▲	34	40	47	73	70	173	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD02-350-XP40-SP11-02	▲	35	40	47	75	70	175	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD02-360-XP40-SP11-02	▲	36	40	47	77	70	177	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD02-370-XP40-SP11-02	▲	37	40	47	79	70	179	SPGT110408-PM/EM	I60M4×10	WT15IP	M6×6	Rc1/4	Picture 2
ZTD02-380-XP40-SP11-02	▲	38	40	47	81	70	181	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD02-390-XP40-SP11-02	▲	39	40	47	83	70	183	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD02-400-XP40-SP11-02	▲	40	40	47	85	70	185	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD02-410-XP40-SP11-02	▲	41	40	47	87	70	187	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD02-420-XP40-SP14-02	△	42	40	52	89	70	199	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD02-430-XP40-SP14-02	△	43	40	52	91	70	201	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD02-440-XP40-SP14-02	△	44	40	52	93	70	203	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD02-450-XP40-SP14-02	△	45	40	52	95	70	205	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD02-460-XP40-SP14-02	△	46	40	52	97	70	207	SPGT140512-PM/EM	I60M5×13	WT20IP	M8×8	Rc1/4	Picture 2
ZTD02-470-XP40-SP14-02	△	47	40	52	99	70	209	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD02-480-XP40-SP14-02	△	48	40	52	101	70	211	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD02-490-XP40-SP14-02	△	49	40	52	103	70	213	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD02-500-XP40-SP14-02	△	50	40	52	105	70	215	SPGT140512-PM/EM	I60M5×13	WT20IP			

▲Stock available △Make-to-order



Indexable shallow drills

ZTD03 3D

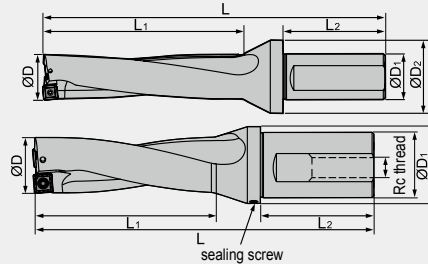

Picture 1

Picture 2

Type	Stock	Basic dimension(mm)						Applicable inserts	Insert screw	wrench	sealing screw	Rc thread	style
		ØD	ØD ₁	ØD ₂	L ₁	L ₂	L						
ZTD03-130-XP20-SP05-02	▲	13	20	25	44	50	111	SPGT050204-PM/EM	I60M2×4.3	WT06IP			
ZTD03-140-XP20-SP05-02	▲	14	20	25	47	50	114	SPGT050204-PM/EM	I60M2×4.3	WT06IP			
ZTD03-150-XP20-SP05-02	▲	15	20	25	50	50	117	SPGT050204-PM/EM	I60M2×4.3	WT06IP			
ZTD03-160-XP20-SP05-02	▲	16	20	25	53	50	120	SPGT050204-PM/EM	I60M2×4.3	WT06IP			
ZTD03-170-XP25-SP06-02	▲	17	25	32	56	56	134	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD03-180-XP25-SP06-02	▲	18	25	32	59	56	137	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD03-190-XP25-SP06-02	▲	19	25	32	62	56	140	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD03-200-XP25-SP06-02	▲	20	25	32	65	56	143	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD03-210-XP25-SP06-02	▲	21	25	32	68	56	146	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD03-220-XP25-SP07-02	▲	22	25	32	71	56	149	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD03-230-XP25-SP07-02	▲	23	25	32	74	56	152	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP	---	---	Picture 1
ZTD03-240-XP25-SP07-02	▲	24	25	32	77	56	155	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD03-250-XP25-SP07-02	▲	25	25	32	80	56	158	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD03-260-XP25-SP07-02	▲	26	25	32	83	56	161	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD03-270-XP25-SP07-02	▲	27	25	32	86	56	164	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD03-280-XP32-SP09-02	▲	28	32	37	89	60	174	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD03-290-XP32-SP09-02	▲	29	32	37	92	60	177	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD03-300-XP32-SP09-02	▲	30	32	37	95	60	180	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD03-310-XP32-SP09-02	▲	31	32	37	98	60	183	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD03-320-XP32-SP09-02	▲	32	32	37	101	60	186	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD03-330-XP32-SP09-02	▲	33	32	37	104	60	189	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD03-340-XP40-SP11-02	▲	34	40	47	107	70	207	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD03-350-XP40-SP11-02	▲	35	40	47	110	70	210	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD03-360-XP40-SP11-02	▲	36	40	47	113	70	213	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD03-370-XP40-SP11-02	▲	37	40	47	116	70	216	SPGT110408-PM/EM	I60M4×10	WT15IP	M6×6	Rc1/4	Picture 2
ZTD03-380-XP40-SP11-02	▲	38	40	47	119	70	219	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD03-390-XP40-SP11-02	▲	39	40	47	122	70	222	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD03-400-XP40-SP11-02	▲	40	40	47	125	70	225	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD03-410-XP40-SP11-02	▲	41	40	47	128	70	228	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD03-420-XP40-SP14-02	△	42	40	52	131	70	241	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD03-430-XP40-SP14-02	△	43	40	52	134	70	244	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD03-440-XP40-SP14-02	△	44	40	52	137	70	247	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD03-450-XP40-SP14-02	△	45	40	52	140	70	250	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD03-460-XP40-SP14-02	△	46	40	52	143	70	253	SPGT140512-PM/EM	I60M5×13	WT20IP	M8×8	Rc1/4	Picture 2
ZTD03-470-XP40-SP14-02	△	47	40	52	146	70	256	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD03-480-XP40-SP14-02	△	48	40	52	149	70	259	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD03-490-XP40-SP14-02	△	49	40	52	152	70	262	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD03-500-XP40-SP14-02	△	50	40	52	155	70	265	SPGT140512-PM/EM	I60M5×13	WT20IP			

▲Stock available △Make-to-order

Drilling tools


Indexable shallow drill



Indexable shallow drills

Indexable shallow drills

ZTD04 4D

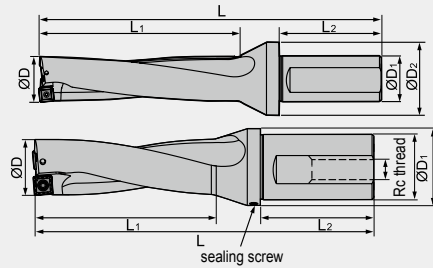

Picture 1

Picture 2

Type	Stock	Basic dimension(mm)						Applicable inserts	Insert screw	wrench	sealing screw	Rc thread	style
		ØD	ØD ₁	ØD ₂	L ₁	L ₂	L						
ZTD04-130-XP20-SP05-02	▲	13	20	25	57	50	124	SPGT050204-PM/EM	I60M2×4.3	WT06IP			
ZTD04-140-XP20-SP05-02	▲	14	20	25	61	50	128	SPGT050204-PM/EM	I60M2×4.3	WT06IP			
ZTD04-150-XP20-SP05-02	▲	15	20	25	65	50	132	SPGT050204-PM/EM	I60M2×4.3	WT06IP			
ZTD04-160-XP20-SP05-02	▲	16	20	25	69	50	136	SPGT050204-PM/EM	I60M2×4.3	WT06IP			
ZTD04-170-XP25-SP06-02	▲	17	25	32	73	56	151	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD04-180-XP25-SP06-02	▲	18	25	32	77	56	155	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD04-190-XP25-SP06-02	▲	19	25	32	81	56	159	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD04-200-XP25-SP06-02	▲	20	25	32	85	56	163	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD04-210-XP25-SP06-02	▲	21	25	32	89	56	167	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD04-220-XP25-SP07-02	▲	22	25	32	93	56	171	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD04-230-XP25-SP07-02	▲	23	25	32	97	56	175	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP	---	---	Picture 1
ZTD04-240-XP25-SP07-02	▲	24	25	32	101	56	179	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD04-250-XP25-SP07-02	▲	25	25	32	105	56	183	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD04-260-XP25-SP07-02	▲	26	25	32	109	56	187	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD04-270-XP25-SP07-02	▲	27	25	32	113	56	191	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD04-280-XP32-SP09-02	▲	28	32	37	117	60	202	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD04-290-XP32-SP09-02	▲	29	32	37	121	60	206	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD04-300-XP32-SP09-02	▲	30	32	37	125	60	210	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD04-310-XP32-SP09-02	▲	31	32	37	129	60	214	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD04-320-XP32-SP09-02	▲	32	32	37	133	60	218	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD04-330-XP32-SP09-02	▲	33	32	37	137	60	222	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD04-340-XP40-SP11-02	▲	34	40	47	141	70	241	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD04-350-XP40-SP11-02	▲	35	40	47	145	70	245	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD04-360-XP40-SP11-02	▲	36	40	47	149	70	249	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD04-370-XP40-SP11-02	▲	37	40	47	153	70	253	SPGT110408-PM/EM	I60M4×10	WT15IP	M6×6	Rc1/4	Picture 2
ZTD04-380-XP40-SP11-02	▲	38	40	47	157	70	257	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD04-390-XP40-SP11-02	▲	39	40	47	161	70	261	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD04-400-XP40-SP11-02	▲	40	40	47	165	70	265	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD04-410-XP40-SP11-02	▲	41	40	47	169	70	269	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD04-420-XP40-SP14-02	△	42	40	52	173	70	283	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD04-430-XP40-SP14-02	△	43	40	52	177	70	287	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD04-440-XP40-SP14-02	△	44	40	52	181	70	291	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD04-450-XP40-SP14-02	△	45	40	52	185	70	295	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD04-460-XP40-SP14-02	△	46	40	52	189	70	299	SPGT140512-PM/EM	I60M5×13	WT20IP	M8×8	Rc1/4	Picture 2
ZTD04-470-XP40-SP14-02	△	47	40	52	193	70	303	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD04-480-XP40-SP14-02	△	48	40	52	197	70	307	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD04-490-XP40-SP14-02	△	49	40	52	201	70	311	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD04-500-XP40-SP14-02	△	50	40	52	205	70	315	SPGT140512-PM/EM	I60M5×13	WT20IP			

▲Stock available △Make-to-order


Drilling tools

Indexable shallow drill



Indexable shallow drills

ZTD05 5D

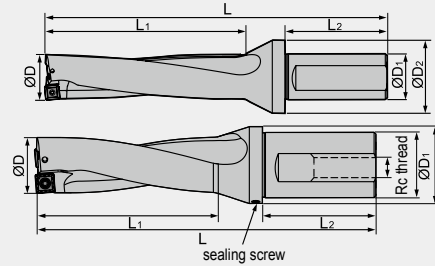

Picture 1

Picture 2

Type	Stock	Basic dimension(mm)						Applicable inserts	Insert screw	wrench	sealing screw	Rc thread	style
		ØD	ØD ₁	ØD ₂	L ₁	L ₂	L						
ZTD05-170-XP25-SP06-02	▲	17	25	32	90	56	168	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD05-180-XP25-SP06-02	▲	18	25	32	95	56	173	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD05-190-XP25-SP06-02	▲	19	25	32	100	56	178	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD05-200-XP25-SP06-02	▲	20	25	32	105	56	183	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD05-210-XP25-SP06-02	▲	21	25	32	110	56	188	SPGT060204-PM/EM	I60M2.2×5.5	WT07IP			
ZTD05-220-XP25-SP07-02	▲	22	25	32	115	56	193	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD05-230-XP25-SP07-02	▲	23	25	32	120	56	198	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD05-240-XP25-SP07-02	▲	24	25	32	125	56	203	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD05-250-XP25-SP07-02	▲	25	25	32	130	56	208	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP	---	---	Picture 1
ZTD05-260-XP25-SP07-02	▲	26	25	32	135	56	213	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD05-270-XP25-SP07-02	▲	27	25	32	140	56	218	SPGT07T308-PM/EM	I60M2.5×6.5	WT07IP			
ZTD05-280-XP32-SP09-02	▲	28	32	37	145	60	230	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD05-290-XP32-SP09-02	▲	29	32	37	150	60	235	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD05-300-XP32-SP09-02	▲	30	32	37	155	60	240	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD05-310-XP32-SP09-02	▲	31	32	37	160	60	245	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD05-320-XP32-SP09-02	▲	32	32	37	165	60	250	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD05-330-XP32-SP09-02	▲	33	32	37	170	60	255	SPGT090408-PM/EM	I60M3.5×8	WT15IP			
ZTD05-340-XP40-SP11-02	▲	34	40	47	175	70	275	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD05-350-XP40-SP11-02	▲	35	40	47	180	70	280	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD05-360-XP40-SP11-02	▲	36	40	47	185	70	285	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD05-370-XP40-SP11-02	▲	37	40	47	190	70	290	SPGT110408-PM/EM	I60M4×10	WT15IP	M6×6	Rc1/4	Picture 2
ZTD05-380-XP40-SP11-02	▲	38	40	47	195	70	295	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD05-390-XP40-SP11-02	▲	39	40	47	200	70	300	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD05-400-XP40-SP11-02	▲	40	40	47	205	70	305	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD05-410-XP40-SP11-02	▲	41	40	47	210	70	310	SPGT110408-PM/EM	I60M4×10	WT15IP			
ZTD05-420-XP40-SP14-02	△	42	40	52	215	70	325	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD05-430-XP40-SP14-02	△	43	40	52	220	70	330	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD05-440-XP40-SP14-02	△	44	40	52	225	70	335	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD05-450-XP40-SP14-02	△	45	40	52	230	70	340	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD05-460-XP40-SP14-02	△	46	40	52	235	70	345	SPGT140512-PM/EM	I60M5×13	WT20IP	M8×8	Rc1/4	Picture 2
ZTD05-470-XP40-SP14-02	△	47	40	52	240	70	350	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD05-480-XP40-SP14-02	△	48	40	52	245	70	355	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD05-490-XP40-SP14-02	△	49	40	52	250	70	360	SPGT140512-PM/EM	I60M5×13	WT20IP			
ZTD05-500-XP40-SP14-02	△	50	40	52	255	70	365	SPGT140512-PM/EM	I60M5×13	WT20IP			

▲Stock available △Make-to-order


Drilling tools



Indexable shallow drill



Indexable shallow drills

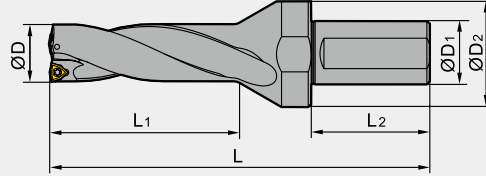3D



Type	Stock	Basic dimension(mm)						Applicable inserts	Screw 	Wrench 
		D	D1	D2	L2	L1	L			
ZD03-160-XP25-WC03-02	△	16	25	32	56	52	129	WCMX030208	I60M2.5×6.5	WT07IP
ZD03-170-XP25-WC03-02	△	17	25	32	56	55	133	WCMX030208	I60M2.5×6.5	WT07IP
ZD03-180-XP25-WC03-02	△	18	25	32	56	58	137	WCMX030208	I60M2.5×6.5	WT07IP
ZD03-190-XP25-WC03-02	△	19	25	32	56	61	140	WCMX030208	I60M2.5×6.5	WT07IP
ZD03-200-XP25-WC03-02	△	20	25	32	56	64	143	WCMX030208	I60M2.5×6.5	WT07IP
ZD03-210-XP25-WC04-02	△	21	25	45	56	67	153	WCMX040208	I60M2.5×6.5T	WT08IP
ZD03-220-XP25-WC04-02	△	22	25	45	56	70	156	WCMX040208	I60M2.5×6.5T	WT08IP
ZD03-230-XP25-WC04-02	△	23	25	45	56	73	159	WCMX040208	I60M2.5×6.5T	WT08IP
ZD03-240-XP25-WC04-02	△	24	25	45	56	76	162	WCMX040208	I60M2.5×6.5T	WT08IP
ZD03-250-XP25-WC04-02	△	25	25	45	56	79	165	WCMX040208	I60M2.5×6.5T	WT08IP
ZD03-260-XP32-WC05-02	△	26	32	55	60	83	176	WCMX050308	I60M3×7	WT09IP
ZD03-270-XP32-WC05-02	△	27	32	55	60	86	180	WCMX050308	I60M3×7	WT09IP
ZD03-280-XP32-WC05-02	△	28	32	55	60	89	184	WCMX050308	I60M3×7	WT09IP
ZD03-290-XP32-WC05-02	△	29	32	55	60	92	188	WCMX050308	I60M3×7	WT09IP
ZD03-300-XP32-WC05-02	△	30	32	55	60	95	192	WCMX050308	I60M3×7	WT09IP
ZD03-310-XP40-WC06-02	△	31	40	60	70	98	203	WCMX06T308	I60M3×7	WT09IP
ZD03-320-XP40-WC06-02	△	32	40	60	70	101	206	WCMX06T308	I60M3×7	WT09IP
ZD03-330-XP40-WC06-02	△	33	40	60	70	104	209	WCMX06T308	I60M3×7	WT09IP
ZD03-340-XP40-WC06-02	△	34	40	60	70	107	212	WCMX06T308	I60M3×7	WT09IP
ZD03-350-XP40-WC06-02	△	35	40	60	70	110	215	WCMX06T308	I60M3×7	WT09IP
ZD03-360-XP40-WC06-02	△	36	40	60	70	113	218	WCMX06T308	I60M3×7	WT09IP
ZD03-370-XP40-WC06-02	△	37	40	60	70	116	221	WCMX06T308	I60M3×7	WT09IP
ZD03-380-XP40-WC06-02	△	38	40	60	70	119	225	WCMX06T308	I60M3×7	WT09IP
ZD03-390-XP40-WC06-02	△	39	40	60	70	122	228	WCMX06T308	I60M3×7	WT09IP

▲Stock available △Make-to-order


Drilling tools



Indexable shallow drill



Indexable shallow drills

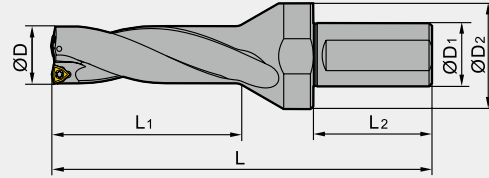3D



Type	Stock	Basic dimension(mm)						Applicable inserts	Screw 	Wrench 
		D	D ₁	D ₂	L ₂	L ₁	L			
ZD03-400-XP40-WC06-02	△	40	40	60	70	125	231	WCMX06T308	I60M3×7	WT09IP
ZD03-410-XP40-WC06-02	△	41	40	60	70	128	234	WCMX06T308	I60M3×7	WT09IP
ZD03-420-XP40-WC08-02	△	42	40	60	70	131	239	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-430-XP40-WC08-02	△	43	40	60	70	134	242	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-440-XP40-WC08-02	△	44	40	60	70	137	245	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-450-XP40-WC08-02	△	45	40	60	70	140	248	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-460-XP40-WC08-02	△	46	40	60	70	143	251	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-470-XP40-WC08-02	△	47	40	60	70	146	253	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-480-XP40-WC08-02	△	48	40	70	70	149	255	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-490-XP40-WC08-02	△	49	40	70	70	152	257	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-500-XP40-WC08-02	△	50	40	70	70	155	259	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-510-XP40-WC08-02	△	51	40	70	70	158	261	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-520-XP40-WC08-02	△	52	40	70	70	161	263	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-530-XP40-WC08-02	△	53	40	70	70	164	265	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-540-XP40-WC08-02	△	54	40	70	70	167	267	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-550-XP40-WC08-02	△	55	40	70	70	170	269	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-560-XP40-WC08-02	△	56	40	70	70	173	271	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-570-XP40-WC08-02	△	57	40	70	70	176	273	WCMX080412	I60M3.5×10.4	WT15IP
ZD03-580-XP40-WC08-02	△	58	40	70	70	179	275	WCMX080412	I60M3.5×10.4	WT15IP

▲Stock available △Make-to-order