


Threading tools code key

Clamping system

Top clamping

Screw clamping

**ZC****ZS**



Thread type

I > Internal thread**E** > External thread


Cutting direction

Right hand

Left hand

**R****L****ZS E R 20 20 K 16**

Nose height



Note: 00 for round tool holder.
Only to integer, for example:
h=8mm is labeled as 08.

Shank width



Note: Diameter for round tool holder
for example: b=8mm is labeled as 08.

Tool length

Code	H	K	M	P	Q	R	S	T	U
Length	100	125	150	170	180	200	250	300	350

Insert size

Code	11	16	22
Triangle side length	11	16	22
Inscribed circle	6.35	9.525	12.70


General turning

Parting and grooving


Threading

Threading insert

External threading tools

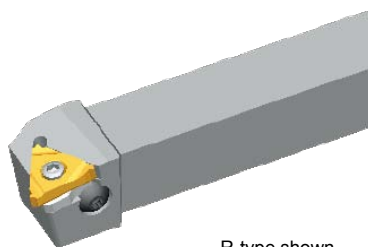

R-type shown

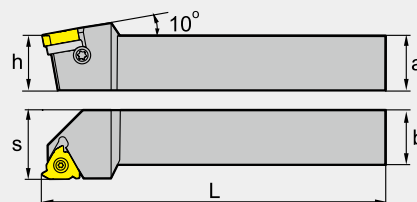


Type		Stock	Basic dimensions(mm)					Applicable inserts	Inserts screw	Shim	Shim screw	Wrench
			a	h	b	L	s					
ZSER	1616H16	▲	16	16	16	100	20	Z16ER□□□□	I60 M3.5X12TT	MT16-□□MN	SM4X8C	WT15IP
	2020K16	▲	20	20	20	125	25					
	2525M16	▲	25	25	25	150	32					
	3225P16	▲	32	32	25	170	32					
	3232P16	▲	32	32	32	170	40					
	2525M22	▲	25	25	25	150	32	Z22ER□□□□	I60 M5X17	MT22-□□MN	SM5X8.5	WT20IP
	3225P22	▲	32	32	25	170	32					
	3232P22	▲	32	32	32	170	40					
	4040S22	△	40	40	40	250	50					
ZSEL	1616H16	▲	16	16	16	100	20	Z16EL□□□□	I60 M3.5X12TT	MT16-□□MN	SM4X8C	WT15IP
	2020K16	▲	20	20	20	125	25					
	2525M16	▲	25	25	25	150	32					
	3225P16	▲	32	32	25	170	32					
	3232P16	▲	32	32	32	170	40					
	2525M22	▲	25	25	25	150	32	Z22EL□□□□	I60 M5X17	MT22-□□MN	SM5X8.5	WT20IP
	3225P22	▲	32	32	25	170	32					
	3232P22	▲	32	32	32	170	40					
	4040S22	△	40	40	40	250	50					


▲Stock available

△Make-to-order

Internal threading tools

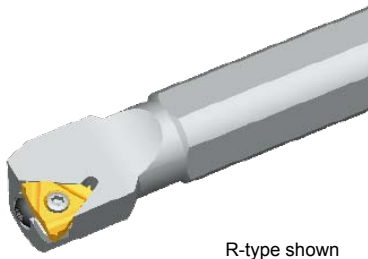

R-type shown

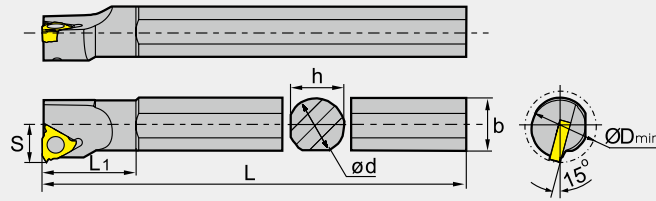

Type		Stock	Basic dimensions(mm)							Applicable inserts	Inserts screw	Shim	Shim screw	Wrench
			d	L	b	D _{min}	s	h	L ₁					
ZSIR	0016K11	▲	16	125	16	12	10	15	20.9	Z11IR□□□□	I60 M2.5X6.5T	---	---	WT08IP
	0016M11	▲	16	150	15.5	16	10.5	15	25.9	Z16IR□□□□	I60 M3.5X08TT	---	---	WT15IP
	0016M16	▲	16	150	15.5	20	12	15	27		I60 M3.5X12TT	MT16-□□MN	SM4X8C	
	0020M16	▲	20	150	19	25	14	18	28.7					
	0020Q16	▲	20	180	19	25	14	18	34					
	0025M16	▲	25	150	24	32	17	23	28.8					
	0032R16	▲	32	200	31	40	22	30	30.9					
	0032S16	▲	32	250	31	40	22	30	30.9					
	0040T16	▲	40	300	38.5	50	27	37	31.5					
	0050U16	▲	50	350	49.5	63	35	49	40.2					
	0020Q22	▲	20	180	21.5	25	15	18	35					
	0025R22	▲	25	200	24	32	19	23	39					
	0032S22	▲	32	250	31	40	22	30	36.4					
	0040T22	▲	40	300	38.5	50	27	37	37.2					
	0050U22	▲	50	350	48.5	63	35	47	42.6					
ZSIL	0016K11	▲	16	125	16	12	10	15	20.9	Z11IL□□□□	I60 M2.5X6.5	---	---	WT07IP
	0016M11	▲	16	150	15.5	16	10.5	15	25.9	Z16IL□□□□	I60 M3.5X08TT	---	---	WT15IP
	0016M16	▲	16	150	15.5	20	12	15	27		I60 M3.5X12	MT16-□□MN	SM4X8C	
	0020M16	▲	20	150	19	25	14	18	28.7					
	0020Q16	▲	20	180	19	25	14	18	34					
	0025M16	▲	25	150	24	32	17	23	28.8					
	0032R16	▲	32	200	31	40	22	30	30.9					
	0032S16	▲	32	250	31	40	22	30	30.9					
	0040T16	▲	40	300	38.5	50	27	37	31.5					
	0050U16	▲	50	350	49.5	63	35	49	40.2					
	0020Q22	▲	20	180	21.5	25	15	18	35					
	0025R22	▲	25	200	24	32	19	23	39					
	0032S22	▲	32	250	31	40	22	30	36.4					
	0040T22	▲	40	300	38.5	50	27	37	37.2					
	0050U22	▲	50	350	48.5	63	35	47	42.6					

▲Stock available

△Make-to-order

General turning

Parting and grooving

Threading


Threading tools

Please follow the following steps to get the best threading result:


- 1 Select proper thread machining method.
- 2 Define helical angle and select shim.
- 3 Select proper insert and tool holder size.
- 4 By checking reference table of standard threading programs, select feasible cutting parameters.
- 5 Select feed way.

Machining method of threading tools


External threading machining (Right thread)

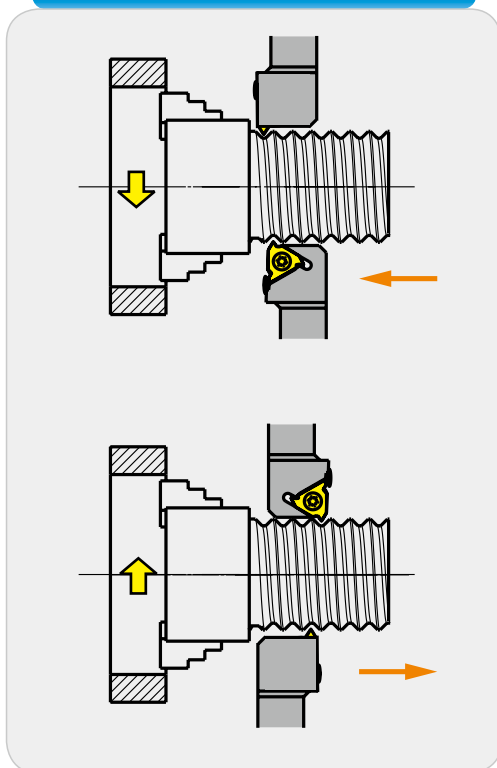


External threading machining (Left thread)

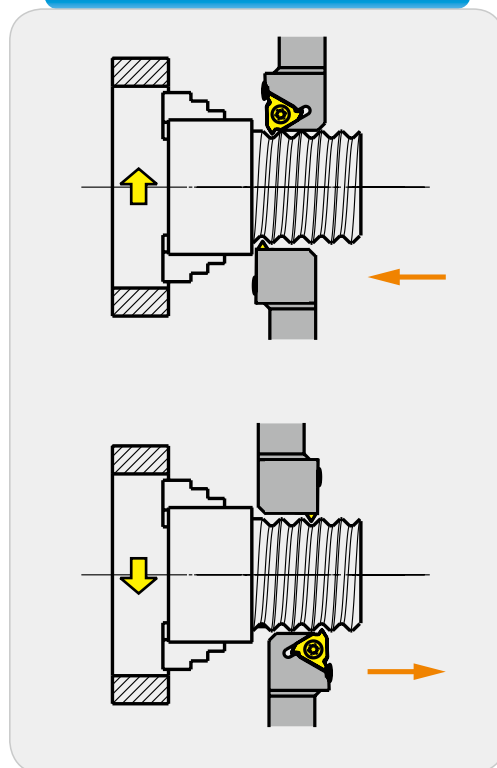

Internal threading machining (Right thread)

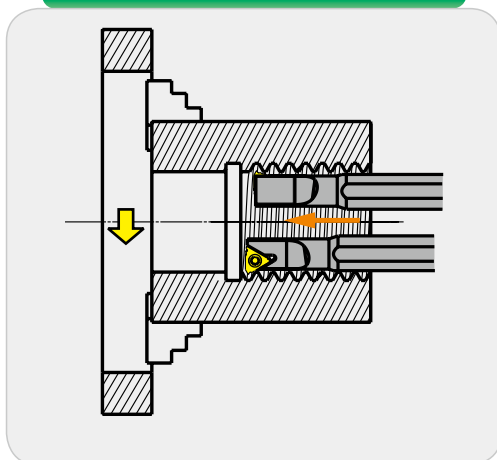

Internal threading machining (Left thread)

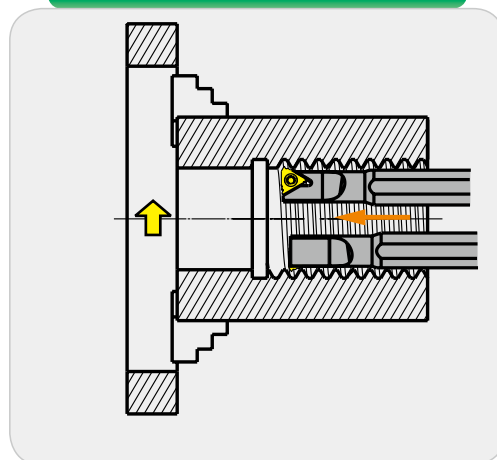

Decide helical angle and select shim

The clearance angle of threading inserts is actually along the edge (flank). This has significant effect on heat diffusion, spread of abrasion as well as tool life, security and pitch quality. The clearance angle of threading pitch on clearance face is determined by thread helical angle. These two angles are similar to each other to some extent. If inclined angle of insert is different from the helical angle, then the clearance angle won't be the same either.

The helical angle of pitch has to be the same with the inclined angle of insert to prevent over wearing on the clearance face which could affect tool life. the helical angle is calculated as below:

$$\theta = \arctan \frac{p}{d_2 \times \pi}$$

P= Pitch

d_2 = pitch diameter

The most common inclined angle is 1°. MT standard shim and its inclined angle is also 1°.

Calculation of clearance angle:

Clearance angle is calculated as below:

$$\beta = \arctan (\tan \theta \times \tan \alpha)$$

2θ =Thread profile angle

α =The rake angle of external standard threading tools is 10°; the rake angle of internal standard threading tools is 15°.

The shim has to be changed when helical angle of thread is $\leq$ clearance angle of tool, which could cause intervene on insert flank.

Please change the shim to adjust the difference between helical angle of thread and inclined angle of shim to be within 2°~0°.


For example: when $P=1.5$, $d_2=24\text{mm}$,
helical angle 1.14° . ($2^\circ \sim 0^\circ$)=inclined angle ($-0.86^\circ \sim 1.14^\circ$)
it is feasible to use standard shim 1° .

Shim specification table is as follows:


Screw pitch range	Insert dimensions	Inclined angle	Shim
0.5-3.0	16	0	MT16-00MN
		1	MT16-01MN
		2	MT16-02MN
		3	MT16-03MN
3.5-6.0	22	0	MT22-00MN
		1	MT22-01MN
		2	MT22-02MN
		3	MT22-03MN

Note: the standard angle of shim for our threading tools is 1°.
(MT16-01MN or MT22-01MN)

θ = Helical angle




λ = Inclined angle



Please refer to the table below for actual value:

Thread profile angle 2θ	β	
	External thread	Internal thread
60°	5.8°	8.79°
55°	5.24°	7.94°
30°	2.7°	4.1°
29°	2.6°	3.96°

Select shim:

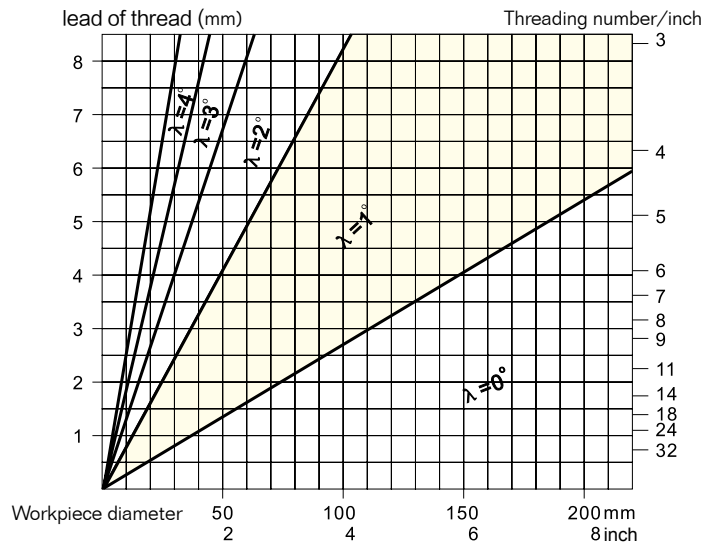

General turning

Parting and grooving

Threading

Application information of threading



Select proper inserts and size of tool holder (Please refer to detailed table of threading tools and inserts)

Parameter table for threading program under different standards

■ Table of recommended in-feed for metric ISO external threading with wiper edge

Screw pitch	1.0	1.25	1.5	1.75	2.0	2.5	3.0	4.0	5.0
Total in-feed	0.72	0.86	1.02	1.17	1.33	1.63	1.94	2.58	3.21
Number of passes	5	6	7	8	9	11	13	15	17
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)								
	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.20/-	0.20/-	0.21/-	0.22/-	0.24/-	0.25/-	0.26/-	0.35/-	0.40/-
2	0.18/0.10	0.18/0.10	0.18/0.10	0.20/0.12	0.22/0.13	0.24/0.14	0.24/0.14	0.30/0.17	0.35/0.20
3	0.16/0.09	0.14/0.09	0.18/0.10	0.18/0.10	0.20/0.12	0.21/0.12	0.20/0.12	0.25/0.14	0.30/0.17
4	0.10/0.06	0.10/0.08	0.15/0.09	0.15/0.09	0.15/0.09	0.18/0.10	0.20/0.12	0.20/0.12	0.28/0.16
5	0.08/-	0.08/0.06	0.12/0.07	0.13/0.08	0.12/0.07	0.15/0.09	0.18/0.10	0.18/0.10	0.25/0.14
6			0.10/0.06	0.11/0.06	0.12/0.07	0.12/0.07	0.15/0.09	0.18/0.10	0.20/0.12
7			0.08/-	0.10/0.06	0.10/0.06	0.12/0.07	0.13/0.08	0.16/0.09	0.18/0.10
8				0.08/-	0.10/0.06	0.10/0.06	0.12/0.07	0.15/0.09	0.16/0.09
9					0.08/-	0.10/0.06	0.10/0.06	0.15/0.09	0.15/0.09
10						0.08/0.05	0.10/0.06	0.13/0.08	0.15/0.09
11						0.08/-	0.08/0.06	0.12/0.07	0.13/0.08
12							0.08/0.05	0.12/0.07	0.13/0.08
13								0.11/0.06	0.12/0.07
14								0.10/0.06	0.12/0.07
15								0.08/-	0.11/0.06
16									0.10/0.06
17									0.08/-

General
turning

Parting and
grooving

Threading

Application information of threading

■ Table of recommended in-feed for metric ISO internal threading with wiper edge

Screw pitch	1.00	1.25	1.5	1.75	2.0	2.5	3.0	4.0	5.0
Total in-feed	0.62	0.77	0.92	1.06	1.21	0.15	1.79	2.36	2.95
Number of passes	5	6	7	8	9	11	13	15	17
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)								
	x/z	x/z	x/z	x/z	x/z	x/z	x/z	x/z	x/z
1	0.18/-	0.20/-	0.22/-	0.23/-	0.24/-	0.25/-	0.26/-	0.30/-	0.32/-
2	0.14/0.08	0.15/0.09	0.16/0.09	0.16/0.09	0.18/0.10	0.20/0.12	0.20/0.12	0.25/0.14	0.28/0.16
3	0.12/0.07	0.12/0.07	0.14/0.08	0.14/0.08	0.15/0.09	0.15/0.09	0.20/0.12	0.22/0.13	0.25/0.14
4	0.10/0.06	0.12/0.07	0.12/0.07	0.13/0.08	0.14/0.08	0.15/0.09	0.18/0.10	0.20/0.12	0.22/0.13
5	0.08/-	0.10/0.06	0.11/0.06	0.12/0.07	0.12/0.07	0.13/0.08	0.15/0.09	0.18/0.10	0.21/0.12
6			0.09/0.05	0.10/0.06	0.11/0.06	0.12/0.07	0.12/0.07	0.15/0.09	0.20/0.12
7			0.08/-	0.10/0.06	0.10/0.06	0.12/0.07	0.12/0.07	0.15/0.09	0.18/0.10
8				0.08/-	0.09/0.05	0.10/0.06	0.10/0.06	0.15/0.09	0.18/0.10
9					0.08/-	0.10/0.06	0.10/0.06	0.12/0.07	0.15/0.09
10						0.09/0.05	0.10/0.06	0.12/0.07	0.15/0.09
11						0.08/-	0.10/0.06	0.12/0.07	0.15/0.09
12							0.08/0.05	0.11/0.06	0.15/0.09
13								0.11/0.06	0.12/0.07
14								0.10/0.06	0.11/0.06
15								0.08/-	0.10/0.06
16									0.10/0.06
17									0.08/-

General turning

Parting and grooving

Threading

Application information of threading



■ Table of recommended in-feed for American unified standard external threading with wiper edge

Screw pitch	24	20	18	16	14	12	11	10	9	8	7	6	5
Total in-feed	0.649	0.779	0.866	0.974	1.113	1.299	1.416	1.558	1.731	1.948	2.226	2.597	3.116
Number of passes	5	6	6	7	9	9	10	11	12	13	14	15	16
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)												
	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.206 —	0.210 —	0.233 —	0.226 —	0.196 —	0.229 —	0.220 —	0.214 —	0.210 —	0.211 —	0.213 —	0.218 —	0.229 —
2	0.148 0.086	0.163 0.094	0.181 0.104	0.188 0.109	0.189 0.110	0.222 0.128	0.228 0.132	0.240 0.139	0.256 0.148	0.276 0.160	0.304 0.176	0.343 0.198	0.399 0.230
3	0.114 0.066	0.125 0.072	0.139 0.080	0.145 0.083	0.146 0.084	0.170 0.098	0.176 0.102	0.184 0.106	0.196 0.113	0.212 0.122	0.234 0.135	0.263 0.152	0.306 0.177
4	0.096 0.055	0.105 0.061	0.117 0.068	0.122 0.070	0.123 0.071	0.143 0.083	0.148 0.086	0.155 0.090	0.165 0.095	0.179 0.103	0.197 0.114	0.222 0.128	0.258 0.149
5	0.085 0.049	0.093 0.054	0.103 0.059	0.107 0.062	0.108 0.062	0.126 0.073	0.131 0.075	0.137 0.079	0.146 0.084	0.158 0.091	0.173 0.100	0.195 0.113	0.227 0.131
6		0.084 0.048	0.093 0.054	0.097 0.056	0.098 0.056	0.114 0.066	0.118 0.068	0.124 0.072	0.132 0.076	0.142 0.082	0.157 0.091	0.177 0.102	0.205 0.119
7				0.089 0.052	0.090 0.052	0.105 0.061	0.109 0.063	0.114 0.066	0.121 0.070	0.131 0.076	0.144 0.083	0.163 0.094	0.189 0.109
8					0.084 0.048	0.098 0.056	0.101 0.058	0.106 0.061	0.113 0.065	0.122 0.070	0.134 0.078	0.151 0.087	0.176 0.101
9					0.079 0.045	0.092 0.053	0.095 0.055	0.100 0.057	0.106 0.061	0.114 0.066	0.126 0.073	0.142 0.082	0.165 0.095
10							0.090 0.052	0.094 0.054	0.100 0.058	0.108 0.063	0.119 0.069	0.134 0.078	0.156 0.090
11								0.090 0.052	0.095 0.055	0.103 0.059	0.113 0.065	0.128 0.074	0.149 0.086
12									0.091 0.053	0.098 0.057	0.108 0.063	0.122 0.071	0.142 0.082
13										0.094 0.054	0.104 0.060	0.117 0.068	0.136 0.079
14											0.100 0.058	0.113 0.065	0.131 0.076
15												0.109 0.063	0.126 0.073
16													0.122 0.071

General turning

Parting and grooving

Threading

Application information of threading

■ Table of recommended in-feed for American unified standard internal threading with wiper edge

Screw pitch	24	20	18	16	14	12	11	10	9	8	7	6	5
Total in-feed	0.573	0.687	0.764	0.860	0.982	1.146	1.250	1.375	1.528	1.719	1.964	2.291	2.750
Number of passes	5	6	6	7	8	9	9	10	11	12	13	14	15
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)												
	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.193/ —	0.200/ —	0.222/ —	0.219/ —	0.220/ —	0.228/ —	0.250/ —	0.247/ —	0.246/ —	0.252/ —	0.262/ —	0.278/ —	0.302/ —
2	0.127/ 0.073	0.239/ 0.081	0.155/ 0.089	0.161/ 0.093	0.173/ 0.100	0.190/ 0.110	0.207/ 0.120	0.216/ 0.125	0.229/ 0.132	0.247/ 0.142	0.271/ 0.156	0.304/ 0.176	0.353/ 0.204
3	0.098/ 0.056	0.107/ 0.062	0.119/ 0.069	0.124/ 0.072	0.132/ 0.076	0.146/ 0.084	0.159/ 0.092	0.166/ 0.096	0.176/ 0.101	0.189/ 0.109	0.208/ 0.120	0.234/ 0.135	0.271/ 0.156
4	0.082/ 0.048	0.090/ 0.052	0.100/ 0.058	0.104/ 0.060	0.112/ 0.064	0.123/ 0.071	0.134/ 0.077	0.140/ 0.081	0.148/ 0.086	0.160/ 0.092	0.175/ 0.101	0.197/ 0.114	0.228/ 0.132
5	0.073/ 0.042	0.079/ 0.046	0.088/ 0.051	0.092/ 0.053	0.098/ 0.057	0.108/ 0.062	0.118/ 0.068	0.123/ 0.071	0.130/ 0.075	0.141/ 0.081	0.1543/ 0.089	0.173/ 0.100	0.201/ 0.116
6		0.072/ 0.041	0.080/ 0.046	0.083/ 0.048	0.089/ 0.051	0.098/ 0.056	0.107/ 0.062	0.111/ 0.064	0.118/ 0.068	0.127/ 0.073	0.140/ 0.081	0.157/ 0.091	0.182/ 0.105
7				0.077/ 0.044	0.082/ 0.047	0.090/ 0.052	0.098/ 0.057	0.102/ 0.059	0.108/ 0.063	0.117/ 0.067	0.128/ 0.074	0.144/ 0.083	0.167/ 0.097
8					0.076/ 0.044	0.084/ 0.048	0.091/ 0.053	0.095/ 0.055	0.101/ 0.058	0.109/ 0.063	0.119/ 0.069	0.134/ 0.078	0.156/ 0.090
9						0.079/ 0.045	0.086/ 0.050	0.090/ 0.052	0.095/ 0.055	0.102/ 0.059	0.112/ 0.065	0.126/ 0.073	0.146/ 0.084
10								0.085/ 0.049	0.090/ 0.052	0.097/ 0.056	0.106/ 0.061	0.119/ 0.069	0.138/ 0.080
11									0.085/ 0.049	0.092/ 0.053	0.101/ 0.058	0.113/ 0.065	0.131/ 0.076
12										0.088/ 0.051	0.096/ 0.056	0.108/ 0.063	0.126/ 0.073
13											0.092/ 0.053	0.101/ 0.060	0.121/ 0.070
14												0.100/ 0.058	0.116/ 0.067
15													0.112/ 0.065



Table of recommended in-feed for British standard internal and external threading with wiper edge

Screw pitch	28	20	19	16	14	12	11	10	9	8	7	6	5
Total in-feed	0.581	0.813	0.856	1.017	1.162	1.355	1.479	1.626	1.807	2.033	2.324	2.711	3.253
Number of passes	5	6	6	8	8	9	9	10	11	12	14	15	16
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)												
	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.179 / 0.070	0.211 / 0.089	0.223 / 0.094	0.196 / 0.097	0.223 / 0.111	0.226 / 0.122	0.246 / 0.133	0.236 / 0.139	0.230 / 0.147	0.255 / 0.158	0.195 / 0.167	0.197 / 0.189	0.204 / 0.219
2	0.104 / 0.054	0.132 / 0.069	0.139 / 0.072	0.143 / 0.074	0.163 / 0.085	0.180 / 0.093	0.197 / 0.102	0.206 / 0.106	0.216 / 0.113	0.233 / 0.121	0.247 / 0.128	0.278 / 0.145	0.323 / 0.168
3	0.087 / 0.045	0.111 / 0.058	0.117 / 0.061	0.120 / 0.063	0.138 / 0.072	0.151 / 0.079	0.165 / 0.086	0.172 / 0.090	0.182 / 0.095	0.197 / 0.102	0.208 / 0.108	0.234 / 0.122	0.272 / 0.142
4	0.077 / 0.040	0.098 / 0.051	0.103 / 0.054	0.106 / 0.055	0.121 / 0.063	0.133 / 0.069	0.145 / 0.076	0.152 / 0.079	0.161 / 0.084	0.1738 / 0.090	0.183 / 0.095	0.207 / 0.108	0.240 / 0.125
5		0.089 / 0.046	0.093 / 0.049	0.096 / 0.050	0.110 / 0.057	0.121 / 0.063	0.131 / 0.068	0.137 / 0.071	0.145 / 0.076	0.157 / 0.082	0.166 / 0.086	0.187 / 0.097	0.217 / 0.113
6				0.088 / 0.046	0.101 / 0.052	0.111 / 0.058	0.121 / 0.063	0.126 / 0.066	0.134 / 0.070	0.144 / 0.075	0.152 / 0.079	0.172 / 0.089	0.200 / 0.104
7				0.082 / 0.043	0.093 / 0.049	0.103 / 0.054	0.113 / 0.059	0.117 / 0.061	0.124 / 0.065	0.134 / 0.070	0.142 / 0.074	0.160 / 0.083	0.186 / 0.097
8						0.097 / 0.050	0.106 / 0.055	0.110 / 0.057	0.117 / 0.061	0.126 / 0.066	0.133 / 0.069	0.150 / 0.078	0.174 / 0.091
9								0.104 / 0.054	0.111 / 0.058	0.119 / 0.062	0.126 / 0.066	0.142 / 0.074	0.165 / 0.086
10									0.105 / 0.055	0.113 / 0.059	0.120 / 0.062	0.135 / 0.070	0.157 / 0.082
11										0.108 / 0.056	0.114 / 0.060	0.129 / 0.067	0.150 / 0.078
12											0.110 / 0.055	0.124 / 0.064	0.144 / 0.075
13												0.119 / 0.062	0.138 / 0.072
14												0.115 / 0.060	0.133 / 0.069
15													0.129 / 0.067
16													

General turning

Parting and grooving

Threading

Application information of threading

■ Table of recommended in-feed for NPT internal and external threading with wiper edge

Screw pitch	27	18	14	11.5	8
Total in-feed	0.75	1.129	1.451	1.767	2.54
Number of passes	6	8	10	12	14
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)				
	X/Z	X/Z	X/Z	X/Z	X/Z
1	0.19/-	0.22/-	0.240/-	0.24/-	0.255/-
2	0.15/0.087	0.181/0.104	0.200/0.115	0.208/0.120	0.250/0.144
3	0.13/0.075	0.152/0.088	0.170/0.098	0.182/0.105	0.245/0.141
4	0.11/0.063	0.141/0.081	0.150/0.086	0.168/0.097	0.230/0.133
5	0.09/0.052	0.131/0.075	0.140/0.081	0.155/0.089	0.210/0.121
6	0.08/0.46	0.121/0.070	0.130/0.075	0.145/0.084	0.195/0.112
7		0.101/0.058	0.120/0.069	0.138/0.079	0.180/0.104
8		0.082/0.047	0.110/0.063	0.124/0.072	0.175/0.101
9			0.100/0.058	0.117/0.067	0.170/0.098
10			0.091/0.052	0.105/0.060	0.155/0.089
11				0.095/0.055	0.140/0.080
12				0.090/0.052	0.125/0.072
13					0.110/0.063
14					0.100/0.058

■ Table of recommended in-feed for BSPT internal and external threading with wiper edge

Screw pitch	28	19	14	11
Total in-feed	0.581	0.856	1.162	1.479
Number of passes	5	6	8	10
Order to follow in threading operation	Value of radial in-feed (X) and flank in-feed (Z)			
	X/Z	X/Z	X/Z	X/Z
1	0.179/-	0.223/-	0.222/-	0.214/-
2	0.134/0.070	0.181/0.094	0.213/0.111	0.242/0.126
3	0.103/0.054	0.139/0.072	0.163/0.085	0.186/0.097
4	0.087/0.045	0.117/0.061	0.138/0.072	0.157/0.082
5	0.078/0.040	0.103/0.054	0.121/0.063	0.138/0.072
6		0.093/0.049	0.110/0.057	0.125//0.065
7			0.101/0.052	0.115/0.060
8			0.094/0.049	0.107/0.056
9				0.100/0.052
10				0.095//0.049

General turning

Parting and grooving

Threading

Application information of threading



Table of recommended cutting parameters

ISO	Material		Unit cutting force Kc0.4 N/mm ²	Hardness HB	Grade	
					YBG202 YBG203 YBG205	
					Cutting speed(m/min)	
P	Carbon steel	C=0.15%	1900	125	150~175	
		C=0.35%	2100	150	140~155	
		C=0.60%	2250	200	130~145	
	Alloy steel	Anneal	2100	180	110~130	
		Hardened	2600	275	80~100	
		Hardened	2700	300	70~90	
		Hardened	2850	350	60~80	
	High alloy steel	Anneal	2600	200	90~115	
		Hardened	3900	325	70~90	
	Cast steel	Non-alloy	2000	180	180~210	
		low alloy	2500	200	90~115	
		high alloy	2700	225	90~115	
Martensite steel 12%Mn		3600	250	40~50		
M	Stainless steel	Austenite	2450	180	110~130	
		Martensite/Ferrite	2300	200	130~170	
K	Malleable cast iron	Ferrite	1100	130	110~140	
		Pearlite	1100	230	85~105	
	Gray cast iron	Low tensile-strength	1100	180	110~140	
		High tensile-strength	1500	260	90~115	
	Nodular cast iron	Ferrite	1100	160	110~130	
		Pearlite	1800	250	80~100	
N	Al alloy	Non-aging treatment		500	60	1300~1450
		Aging treatment		800	100	450~500
	Cast aluminum alloy	Non-aging treatment		750	75	430~470
		Aging treatment		900	90	250~290
S	Heat resistant alloy	Iron base	Anneal	3000	200	35~50
			Aging	3050	280	25~35
		Ni- or Co- base	Anneal	3500	250	15~25
			Aging	4150	350	10~20
			Casting	4150	320	10~15
H	Hardened steel	Hardened steel		4500	HRC55	40~50

Note: •The values in the above table are range values. High values in the range could be considered in actual cutting. When trying new cutting speed, please check the cutting edge condition before operation.


•In stainless steel threading, high cutting speed should be used to prevent built-up edge.

•The cutting parameters should be reduced when cutting small pitch thread and when using tools with small nose radius.

•When cutting thread by tools with small nose radius, such as NPT standard thread, it is advisable to use tools with big nose radius first to rough, so as to improve the life of tools with small nose radius.


In-feed way of threading tools

Radial in-feed




- Easy operating, high general.
- V-shape chip caused by long chip steel workpiece will produce big bend stress on cutting edge.
- It requires low cutting depth, sharp cutting edge and good tough material.
- Big quantity of heat when cutting, V-shape chip is hard to control.
- Because the interface of cutting chips on the right and left side is long, so it is easy to cause vibration and make the cutting edge suffer more overloading.

Flank in-feed




- Cutting edge suffer small bend stress, stable estate, it is easy for chips formation in deep cutting depth.
- There are enough space to leave chips flow when flank in-feed.
- Big abrasion on right flank.

Modified flank in-feed



- Right Cutting Edge also engage on cutting depth to a certain extent, it can reduce the abrasion on right side of clearance face.
- Cutting edge suffer small bend stress, stable estate, it is easy for chips formation in deep cutting depth.
- Good Cutting Performance.

Alternate flank in-feed



- Cutting edge trade off when machining, equality abrasion on left and right side of clearance face on cutting edge, it can improve the life of tools.
- Chips are flowing from both of right and left side, good chips flowing.
- Recommend using in big screw-pitch thread cutting.

General turning

Parting and grooving

Threading

Application information of threading



Recommend adopting flank in-feed or alternate flank in-feed under allowable range of machining equipment or programmer, it can eliminate the machining vibration effectively, and it has enough space discharge the chips between pitch. Cutting edge suffer a small stress, machining stable, it likes the general turning process when machining thread, good chip control without extra chips.