



Achieving the optimization of tool structure through analysis of simulated cutting.

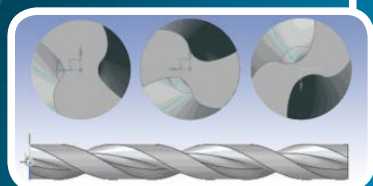


Design with change parameter helical flute, good rigidity and chip removal capability.


Unique cutting edge design, good chip breaking capability even for sticky, softer materials, high versatility.



Double special guiding margin, more credible guiding and more stable machining.



Special nano structure coating with better self lubricating capability and superb wear resistance.



1588SL series deep hole twist drills

1588SL series deep hole twist drills

Outstandingly chip breaking capability




Work piece: crank shaft
Work piece material: 40Cr
Machining area: inclined oil hole
Tool type: 1588SL20C-0690/KDG303
Cutting parameters: $V_c = 80 \sim 120 \text{ m/min}$
 $f_r = 0.2 \sim 0.4 \text{ mm/r}$
Cooling system: Water soluble liquid
Drilling depth: 105mm



Extremely high efficiency and long tool life




Work piece: cylinder
Work material: HT300
Machined area: crank shaft joint surface drilling
Drilling depth: 30mm
Tool type: 1588SL12C-0850/KDG303
Recommend parameters: $V_c = 80 \text{ m/min}$ $f_r = 0.2 \text{ mm/r}$
Cooling system: water-soluble liquid

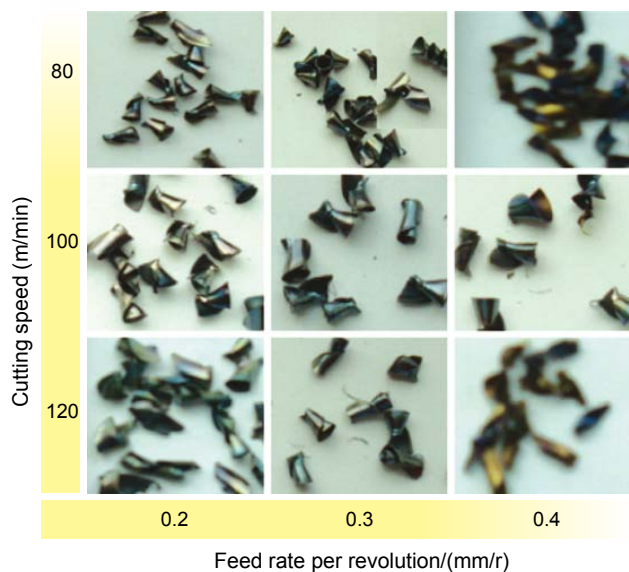

Good chip breaking capability and stable machining with different cutting speed and feed rate.

Comparison of tool life (number of machined holes)

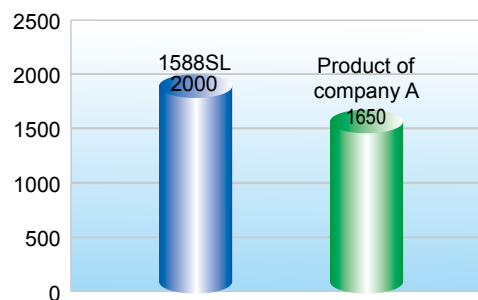

Comparison of tool life (tool wear)





1588SL (regular wear)



Product of company A (falling)

Good cutting performance

Tool type: 1588SL12C-0850/KDG303
 Feed rate: 0.2mm/r Drilling depth: 72mm
 Work material: 42CrMo(HB250)
 Cooling system: Emulsified liquid
 Cutting speed: 80m/min
 Machine equipment: Vertical machining center

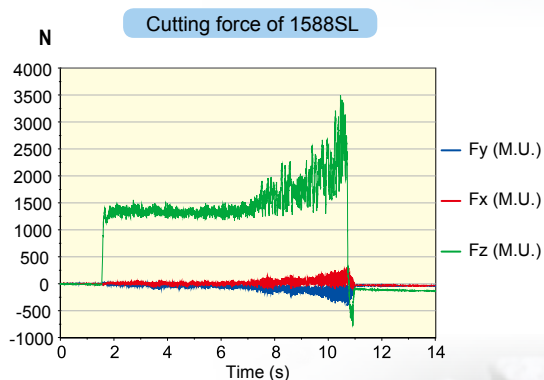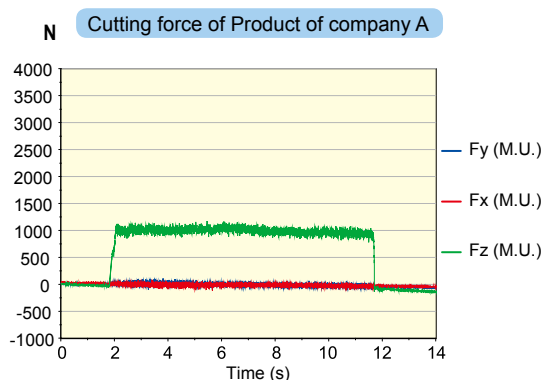


Stable machining precision




Workpiece: Die
 Machined materials: 738H
 Machined area: Hole of sidewall
 Drilling depth: 70mm
 Tool type: 1588SL12C-0600/KDG303
 Recommended parameters: $V_c=85\text{m/min}$, $f_r=0.2\text{mm/r}$
 Cooling system: Water-soluble liquid

Comparison of Machined Hole's Accuracy

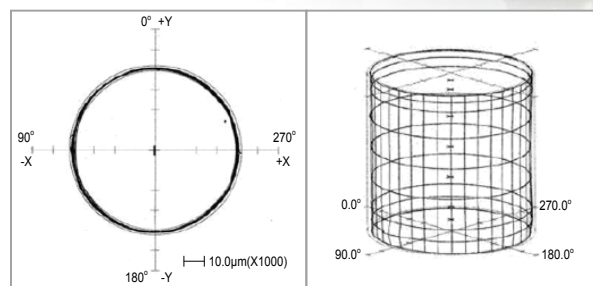

1588SL

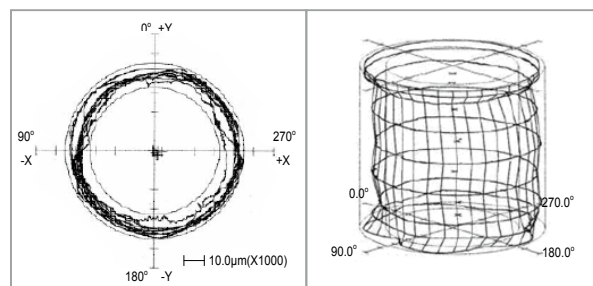

Product of company A




SL series

SL series Deep-hole machining




Internal coolant

Straight shank



12D



20D/30D

- Suitable for deep-hole drilling of steel, cast iron etc.

Drill diameter d1 12D(m7) 20D/30D(h7)	Drilling depth (l/d)	Type	Basic dimension(mm)				
			Shank diameter	Overall length	Flute length	Recommended drilling depth	Shank length
			d2(h5)	l1	l2	l3	l4
3.0	12	1588SL12C-0300	6	90	50	40	36
	20	1588SL20C-0300	6	110	70	62	36
	30	1588SL30C-0300	6	140	100	92	36
3.1	12	1588SL12C-0310	6	90	50	40	36
	20	1588SL20C-0310	6	123	83	72	36
	30	1588SL30C-0310	6	160	120	108	36
3.2	12	1588SL12C-0320	6	90	50	40	36
	20	1588SL20C-0320	6	123	83	72	36
	30	1588SL30C-0320	6	160	120	108	36
3.3	12	1588SL12C-0330	6	90	50	40	36
	20	1588SL20C-0330	6	123	83	72	36
	30	1588SL30C-0330	6	160	120	108	36
3.4	12	1588SL12C-0340	6	90	50	40	36
	20	1588SL20C-0340	6	123	83	72	36
	30	1588SL30C-0340	6	160	120	108	36
3.5	12	1588SL12C-0350	6	90	50	40	36
	20	1588SL20C-0350	6	123	83	72	36
	30	1588SL30C-0350	6	160	120	108	36
3.6	12	1588SL12C-0360	6	90	50	40	36
	20	1588SL20C-0360	6	136	96	84	36
	30	1588SL30C-0360	6	176	136	124	36
3.7	12	1588SL12C-0370	6	90	50	46	36
	20	1588SL20C-0370	6	136	96	84	36
	30	1588SL30C-0370	6	176	136	124	36
3.8	12	1588SL12C-0380	6	90	50	46	36
	20	1588SL20C-0380	6	136	96	84	36
	30	1588SL30C-0380	6	176	136	124	36
3.9	12	1588SL12C-0390	6	90	50	46	36
	20	1588SL20C-0390	6	136	96	84	36
	30	1588SL30C-0390	6	176	136	124	36
4.0	12	1588SL12C-0400	6	102	64	56	36
	20	1588SL20C-0400	6	136	96	84	36
	30	1588SL30C-0400	6	176	136	124	36
4.1	12	1588SL12C-0410	6	102	64	56	36
	20	1588SL20C-0410	6	148	108	96	36
	30	1588SL30C-0410	6	192	152	140	36

Drill diameter d1 12D(m7) 20D/30D(h7)	Drilling depth (l/d)	Type	Basic dimension(mm)				
			Shank diameter	Overall length	Flute length	Recommended drilling depth	Shank length
			d2(h5)	l1	l2	l3	l4
4.2	12	1588SL12C-0420	6	102	64	56	36
	20	1588SL20C-0420	6	148	108	96	36
	30	1588SL30C-0420	6	192	152	140	36
4.3	12	1588SL12C-0430	6	102	64	56	36
	20	1588SL20C-0430	6	148	108	96	36
	30	1588SL30C-0430	6	192	152	140	36
4.4	12	1588SL12C-0440	6	102	64	56	36
	20	1588SL20C-0440	6	148	108	96	36
	30	1588SL30C-0440	6	192	152	140	36
4.5	12	1588SL12C-0450	6	102	64	56	36
	20	1588SL20C-0450	6	148	108	96	36
	30	1588SL30C-0450	6	192	152	140	36
4.6	12	1588SL12C-0460	6	102	64	56	36
	20	1588SL20C-0460	6	158	118	106	36
	30	1588SL30C-0460	6	208	168	156	36
4.7	12	1588SL12C-0470	6	102	64	56	36
	20	1588SL20C-0470	6	158	118	106	36
	30	1588SL30C-0470	6	208	168	156	36
4.8	12	1588SL12C-0480	6	102	64	56	36
	20	1588SL20C-0480	6	158	118	106	36
	30	1588SL30C-0480	6	208	168	156	36
4.9	12	1588SL12C-0490	6	102	64	56	36
	20	1588SL20C-0490	6	158	118	106	36
	30	1588SL30C-0490	6	208	168	156	36
5.0	12	1588SL12C-0500	6	116	78	72	36
	20	1588SL20C-0500	6	158	118	106	36
	30	1588SL30C-0500	6	208	168	156	36
5.1	12	1588SL12C-0510	6	116	78	72	36
	20	1588SL20C-0510	6	168	128	116	36
	30	1588SL30C-0510	6	228	188	170	36
5.2	12	1588SL12C-0520	6	116	78	72	36
	20	1588SL20C-0520	6	168	128	116	36
	30	1588SL30C-0520	6	228	188	170	36
5.3	12	1588SL12C-0530	6	116	78	72	36
	20	1588SL20C-0530	6	168	128	116	36
	30	1588SL30C-0530	6	228	188	170	36

Drill diameter d1 12D(m7) 20D/30D(h7)	Drilling depth (l/d)	Type	Basic dimension(mm)				
			Shank diameter	Overall length	Flute length	Recommended drilling depth	Shank length
			d2(h5)	l1	l2	l3	l4
5.4	12	1588SL12C-0540	6	116	78	72	36
	20	1588SL20C-0540	6	168	128	116	36
	30	1588SL30C-0540	6	228	188	170	36
5.5	12	1588SL12C-0550	6	116	78	72	36
	20	1588SL20C-0550	6	168	128	116	36
	30	1588SL30C-0550	6	228	188	170	36
5.6	12	1588SL12C-0560	6	116	78	72	36
	20	1588SL20C-0560	6	180	140	126	36
	30	1588SL30C-0560	6	240	200	182	36
5.7	12	1588SL12C-0570	6	116	78	72	36
	20	1588SL20C-0570	6	180	140	126	36
	30	1588SL30C-0570	6	240	200	182	36
5.8	12	1588SL12C-0580	6	116	78	72	36
	20	1588SL20C-0580	6	180	140	126	36
	30	1588SL30C-0580	6	240	200	182	36
5.9	12	1588SL12C-0590	6	116	78	72	36
	20	1588SL20C-0590	6	180	140	126	36
	30	1588SL30C-0590	6	240	200	182	36
6.0	12	1588SL12C-0600	6	116	78	72	36
	20	1588SL20C-0600	6	180	140	126	36
	30	1588SL30C-0600	6	240	200	182	36
6.1	12	1588SL12C-0610	8	131	93	84	36
	20	1588SL20C-0610	8	192	150	132	36
	30	1588SL30C-0610	8	260	220	202	36
6.2	12	1588SL12C-0620	8	131	93	84	36
	20	1588SL20C-0620	8	192	150	132	36
	30	1588SL30C-0620	8	260	220	202	36
6.3	12	1588SL12C-0630	8	131	93	84	36
	20	1588SL20C-0630	8	192	150	132	36
	30	1588SL30C-0630	8	260	220	202	36
6.4	12	1588SL12C-0640	8	131	93	84	36
	20	1588SL20C-0640	8	192	150	132	36
	30	1588SL30C-0640	8	260	220	202	36
6.5	12	1588SL12C-0650	8	131	93	84	36
	20	1588SL20C-0650	8	192	150	132	36
	30	1588SL30C-0650	8	260	220	202	36
6.6	12	1588SL12C-0660	8	131	93	84	36
	20	1588SL20C-0660	8	202	162	144	36
	30	1588SL30C-0660	8	272	232	214	36
6.7	12	1588SL12C-0670	8	131	93	84	36
	20	1588SL20C-0670	8	202	162	144	36
	30	1588SL30C-0670	8	272	232	214	36
6.8	12	1588SL12C-0680	8	131	93	84	36
	20	1588SL20C-0680	8	202	162	144	36
	30	1588SL30C-0680	8	272	232	214	36
6.9	12	1588SL12C-0690	8	131	93	84	36
	20	1588SL20C-0690	8	202	162	144	36
	30	1588SL30C-0690	8	272	232	214	36
7.0	12	1588SL12C-0700	8	131	93	84	36
	20	1588SL20C-0700	8	202	162	144	36
	30	1588SL30C-0700	8	272	232	214	36
7.1	12	1588SL12C-0710	8	146	108	96	36
	20	1588SL20C-0710	8	213	173	155	36
	30	1588SL30C-0710	8	290	250	232	36
7.2	12	1588SL12C-0720	8	146	108	96	36
	20	1588SL20C-0720	8	213	173	155	36
	30	1588SL30C-0720	8	290	250	232	36
7.3	12	1588SL12C-0730	8	146	108	96	36
	20	1588SL20C-0730	8	213	173	155	36
	30	1588SL30C-0730	8	290	250	232	36
7.4	12	1588SL12C-0740	8	146	108	96	36
	20	1588SL20C-0740	8	213	173	155	36
	30	1588SL30C-0740	8	290	250	232	36
7.5	12	1588SL12C-0750	8	146	108	96	36
	20	1588SL20C-0750	8	213	173	155	36
	30	1588SL30C-0750	8	290	250	232	36
7.6	12	1588SL12C-0760	8	146	108	96	36
	20	1588SL20C-0760	8	223	183	165	36
	30	1588SL30C-0760	8	305	265	246	36
7.7	12	1588SL12C-0770	8	146	108	96	36
	20	1588SL20C-0770	8	223	183	165	36
	30	1588SL30C-0770	8	305	265	246	36

Applicable material table

⊙Very suitable ⊙Suitable

Grade	Workpiece material										
	Mild steel HB≤180	Carbon steel, Alloy steel	Pre-hardened steel, Hardened steel			Stainless steel	Cast iron	Nodular cast iron	Aluminum alloy	Copper alloy	Heat resistant alloy
			~40HRC	~50HRC	~60HRC						
KDG303	○	⊙	⊙			○	⊙	⊙	○		○

Code key

C6

Cutting parameters

C77

Cutting parameters

C80-C86





SL series

SL series Deep-hole machining



Internal coolant

Straight shank



- Suitable for deep-hole drilling of steel, cast iron etc.

Drill diameter d1 12D(m7) 20D/30D(h7)	Drilling depth (l/d)	Type	Basic dimension(mm)				
			Shank diameter	Overall length	Flute length	Recommended drilling depth	Shank length
			d2(h5)	l1	l2	l3	l4
7.8	12	1588SL12C-0780	8	146	108	96	36
	20	1588SL20C-0780	8	223	183	165	36
	30	1588SL30C-0780	8	305	265	246	36
7.9	12	1588SL12C-0790	8	146	108	96	36
	20	1588SL20C-0790	8	223	183	165	36
	30	1588SL30C-0790	8	305	265	246	36
8.0	12	1588SL12C-0800	8	146	108	96	36
	20	1588SL20C-0800	8	223	183	165	36
	30	1588SL30C-0800	8	305	265	246	36
8.1	12	1588SL12C-0810	10	162	120	108	40
	20	1588SL20C-0810	10	239	195	176	40
	30	1588SL30C-0810	10	330	285	265	40
8.2	12	1588SL12C-0820	10	162	120	108	40
	20	1588SL20C-0820	10	239	195	176	40
	30	1588SL30C-0820	10	330	285	265	40
8.3	12	1588SL12C-0830	10	162	120	108	40
	20	1588SL20C-0830	10	239	195	176	40
	30	1588SL30C-0830	10	330	285	265	40
8.4	12	1588SL12C-0840	10	162	120	108	40
	20	1588SL20C-0840	10	239	195	176	40
	30	1588SL30C-0840	10	330	285	265	40
8.5	12	1588SL12C-0850	10	162	120	108	40
	20	1588SL20C-0850	10	239	195	176	40
	30	1588SL30C-0850	10	330	285	265	40
8.6	12	1588SL12C-0860	10	162	120	108	40
	20	1588SL20C-0860	10	249	205	186	40
	30	1588SL30C-0860	10	340	295	275	40
8.7	12	1588SL12C-0870	10	162	120	108	40
	20	1588SL20C-0870	10	249	205	186	40
	30	1588SL30C-0870	10	340	295	275	40
8.8	12	1588SL12C-0880	10	162	120	108	40
	20	1588SL20C-0880	10	249	205	186	40
	30	1588SL30C-0880	10	340	295	275	40
8.9	12	1588SL12C-0890	10	162	120	108	40
	20	1588SL20C-0890	10	249	205	186	40
	30	1588SL30C-0890	10	340	295	275	40

Drill diameter d1 12D(m7) 20D/30D(h7)	Drilling depth (l/d)	Type	Basic dimension(mm)				
			Shank diameter	Overall length	Flute length	Recommended drilling depth	Shank length
			d2(h5)	l1	l2	l3	l4
9.0	12	1588SL12C-0900	10	162	120	108	40
	20	1588SL20C-0900	10	249	205	186	40
	30	1588SL30C-0900	10	340	295	275	40
9.1	12	1588SL12C-0910	10	174	132	120	40
	20	1588SL20C-0910	10	262	218	196	40
	30	1588SL30C-0910	10	360	315	292	40
9.2	12	1588SL12C-0920	10	174	132	120	40
	20	1588SL20C-0920	10	262	218	196	40
	30	1588SL30C-0920	10	360	315	292	40
9.3	12	1588SL12C-0930	10	174	132	120	40
	20	1588SL20C-0930	10	262	218	196	40
	30	1588SL30C-0930	10	360	315	292	40
9.4	12	1588SL12C-0940	10	174	132	120	40
	20	1588SL20C-0940	10	262	218	196	40
	30	1588SL30C-0940	10	360	315	292	40
9.5	12	1588SL12C-0950	10	174	132	120	40
	20	1588SL20C-0950	10	262	218	196	40
	30	1588SL30C-0950	10	360	315	292	40
9.6	12	1588SL12C-0960	10	174	132	120	40
	20	1588SL20C-0960	10	272	228	206	40
	30	1588SL30C-0960	10	372	328	305	40
9.7	12	1588SL12C-0970	10	174	132	120	40
	20	1588SL20C-0970	10	272	228	206	40
	30	1588SL30C-0970	10	372	328	305	40
9.8	12	1588SL12C-0980	10	174	132	120	40
	20	1588SL20C-0980	10	272	228	206	40
	30	1588SL30C-0980	10	372	328	305	40
9.9	12	1588SL12C-0990	10	174	132	120	40
	20	1588SL20C-0990	10	272	228	206	40
	30	1588SL30C-0990	10	372	328	305	40
10.0	12	1588SL12C-1000	10	174	132	120	40
	20	1588SL20C-1000	10	272	228	206	40
	30	1588SL30C-1000	10	372	328	305	40
10.1	12	1588SL12C-1010	12	204	156	144	45
	20	1588SL20C-1010	12	292	242	220	45

Drill diameter d1 12D(m7) 20D/30D(h7)	Drilling depth (l/d)	Type	Basic dimension(mm)				
			Shank diameter	Overall length	Flute length	Recommended drilling depth	Shank length
			d2(h5)	l1	l2	l3	l4
10.2	12	1588SL12C-1020	12	204	156	144	45
	20	1588SL20C-1020	12	292	242	220	45
10.3	12	1588SL12C-1030	12	204	156	144	45
	20	1588SL20C-1030	12	292	242	220	45
10.4	12	1588SL12C-1040	12	204	156	144	45
	20	1588SL20C-1040	12	292	242	220	45
10.5	12	1588SL12C-1050	12	204	156	144	45
	20	1588SL20C-1050	12	292	242	220	45
10.6	12	1588SL12C-1060	12	204	156	144	45
	20	1588SL20C-1060	12	300	250	228	45
10.7	12	1588SL12C-1070	12	204	156	144	45
	20	1588SL20C-1070	12	300	250	228	45
10.8	12	1588SL12C-1080	12	204	156	144	45
	20	1588SL20C-1080	12	300	250	228	45
10.9	12	1588SL12C-1090	12	204	156	144	45
	20	1588SL20C-1090	12	300	250	228	45
11.0	12	1588SL12C-1100	12	204	156	144	45
	20	1588SL20C-1100	12	300	250	228	45
11.1	12	1588SL12C-1110	12	204	156	144	45
	20	1588SL20C-1110	12	315	265	240	45
11.2	12	1588SL12C-1120	12	204	156	144	45
	20	1588SL20C-1120	12	315	265	240	45
11.3	12	1588SL12C-1130	12	204	156	144	45
	20	1588SL20C-1130	12	315	265	240	45
11.4	12	1588SL12C-1140	12	204	156	144	45
	20	1588SL20C-1140	12	315	265	240	45
11.5	12	1588SL12C-1150	12	204	156	144	45
	20	1588SL20C-1150	12	315	265	240	45
11.6	12	1588SL12C-1160	12	204	156	144	45
	20	1588SL20C-1160	12	325	275	250	45

Drill diameter d1 12D(m7) 20D/30D(h7)	Drilling depth (l/d)	Type	Basic dimension(mm)				
			Shank diameter	Overall length	Flute length	Recommended drilling depth	Shank length
			d2(h5)	l1	l2	l3	l4
11.7	12	1588SL12C-1170	12	204	156	144	45
	20	1588SL20C-1170	12	325	275	250	45
11.8	12	1588SL12C-1180	12	204	156	144	45
	20	1588SL20C-1180	12	325	275	250	45
11.9	12	1588SL12C-1190	12	204	156	144	45
	20	1588SL20C-1190	12	325	275	250	45
12.0	12	1588SL12C-1200	12	204	156	144	45
	20	1588SL20C-1200	12	325	275	250	45
12.5	12	1588SL12C-1250	14	230	182	168	45
	20	1588SL20C-1250	14	323	275	250	45
12.7	12	1588SL12C-1270	14	230	182	168	45
12.8	12	1588SL12C-1280	14	230	182	168	45
13.0	12	1588SL12C-1300	14	230	182	168	45
	20	1588SL20C-1300	14	338	290	265	45
13.5	12	1588SL12C-1350	14	230	182	168	45
	20	1588SL20C-1350	14	338	290	265	45
14.0	12	1588SL12C-1400	14	230	182	168	45
	20	1588SL20C-1400	14	367	318	290	45
14.5	12	1588SL12C-1450	16	260	208	194	48
15.0	12	1588SL12C-1500	16	260	208	194	48
15.5	12	1588SL12C-1550	16	260	208	194	48
16.0	12	1588SL12C-1600	16	260	208	194	48
16.5	12	1588SL12C-1650	18	286	234	218	48
17.0	12	1588SL12C-1700	18	286	234	218	48
17.5	12	1588SL12C-1750	18	286	234	218	48
18.0	12	1588SL12C-1800	18	286	234	218	48
18.5	12	1588SL12C-1850	20	310	258	240	48
19.0	12	1588SL12C-1900	20	310	258	240	48
19.5	12	1588SL12C-1950	20	310	258	240	48
	20	1588SL12C-2000	20	310	258	240	48

Applicable material table

⊙Very suitable ⊙Suitable

Grade	Workpiece material										
	Mild steel HB≤180	Carbon steel, Alloy steel	Pre-hardened steel, Hardened steel			Stainless steel	Cast iron	Nodular cast iron	Aluminum alloy	Copper alloy	Heat resistant alloy
			~40HRC	~50HRC	~60HRC						
KDG303	○	⊙	⊙			○	⊙	⊙	○		○

Code key C6 Cutting parameters C77 Cutting parameters C80-C86