



AL series for machining aluminum



2-flute flattened end mills with straight shank



AL-2E



- Good chip removal performance, high machining efficiency.



Ordering number	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
AL-2E-D1.0	1.0	4	3	50	2	Picture 1	●
AL-2E-D1.5	1.5	4	4	50	2	Picture 1	●
AL-2E-D2.0	2.0	4	6	50	2	Picture 1	●
AL-2E-D2.5	2.5	4	7	50	2	Picture 1	●
AL-2E-D3.0	3.0	6	9	50	2	Picture 1	●
AL-2E-D4.0	4.0	6	12	50	2	Picture 1	●
AL-2E-D5.0	5.0	6	15	50	2	Picture 1	●
AL-2E-D6.0	6.0	6	18	60	2	Picture 2	●
AL-2E-D8.0	8.0	8	20	60	2	Picture 2	●
AL-2E-D10.0	10.0	10	30	75	2	Picture 2	●
AL-2E-D12.0	12.0	12	32	75	2	Picture 2	●
AL-2E-D16.0	16.0	16	45	100	2	Picture 2	●
AL-2E-D20.0	20.0	20	45	100	2	Picture 2	●

● Stock available ○ Make-to-order


Indexable milling tools

Solid carbide end mills

AL series

➤ Applicable workpiece material table ● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
								●			




B MILLING Solid Carbide End Mills

AL series for machining aluminum


2-flute flattened end mills with straight shank and long cutting edge



AL-2EL





Picture 1



Picture 2

● AL-2E series with long cutting edge.



Ordering number	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
AL-2EL-D3.0	3.0	6	12	60	2	Picture 1	●
AL-2EL-D4.0	4.0	6	16	60	2	Picture 1	●
AL-2EL-D5.0	5.0	6	20	60	2	Picture 1	●
AL-2EL-D6.0	6.0	6	25	75	2	Picture 2	●
AL-2EL-D8.0	8.0	8	32	75	2	Picture 2	●
AL-2EL-D10.0	10.0	10	45	100	2	Picture 2	●
AL-2EL-D12.0	12.0	12	45	100	2	Picture 2	●
AL-2EL-D16.0	16.0	16	65	150	2	Picture 2	●
AL-2EL-D20.0	20.0	20	75	150	2	Picture 2	●

● Stock available ○ Make-to-order

Indexable
milling tools

Solid carbide
end mills

AL series

Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
								○			

Code key

B213

Graphics category and identification

B214


Cutting parameters

B425


3-flute flattened end mills with straight shank



AL-3E




Picture 1



Picture 2

- Outstanding cutting performance with no chattering, achieving high-precision machining.



D ≤ 12 0~-0.020
12 < D 0~-0.030

Ordering number	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
AL-3E-D1.0	1.0	4	3	50	3	Picture 1	●
AL-3E-D1.5	1.5	4	4	50	3	Picture 1	●
AL-3E-D2.0	2.0	4	6	50	3	Picture 1	●
AL-3E-D2.5	2.5	4	7	50	3	Picture 1	●
AL-3E-D3.0	3.0	6	9	50	3	Picture 1	●
AL-3E-D4.0	4.0	6	12	50	3	Picture 1	●
AL-3E-D5.0	5.0	6	15	50	3	Picture 1	●
AL-3E-D6.0	6.0	6	18	60	3	Picture 2	●
AL-3E-D8.0	8.0	8	20	60	3	Picture 2	●
AL-3E-D10.0	10.0	10	30	75	3	Picture 2	●
AL-3E-D12.0	12.0	12	32	75	3	Picture 2	●
AL-3E-D16.0	16.0	16	45	100	3	Picture 2	●
AL-3E-D20.0	20.0	20	45	100	3	Picture 2	●

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

AL series

Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
								○			

Code key **B213**

Graphics category and identification **B214**

Cutting parameters **B426**



B MILLING Solid Carbide End Mills

AL series for machining aluminum



3-flute flattened end mills with straight shank and long cutting edge



AL-3EL



● AL-3E series with long cutting edge.



Ordering number	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
AL-3EL-D3.0	3.0	6	12	60	3	Picture 1	●
AL-3EL-D4.0	4.0	6	16	60	3	Picture 1	●
AL-3EL-D5.0	5.0	6	20	60	3	Picture 1	●
AL-3EL-D6.0	6.0	6	25	75	3	Picture 2	●
AL-3EL-D8.0	8.0	8	32	75	3	Picture 2	●
AL-3EL-D10.0	10.0	10	45	100	3	Picture 2	●
AL-3EL-D12.0	12.0	12	45	100	3	Picture 2	●
AL-3EL-D16.0	16.0	16	65	150	3	Picture 2	●
AL-3EL-D20.0	20.0	20	75	150	3	Picture 2	●

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

AL series

Applicable workpiece material table ●Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
								●			

Code key

B213

Graphics category and identification

B214


Cutting parameters

B426



2-flute ball nose end mills with straight shank



AL-2B

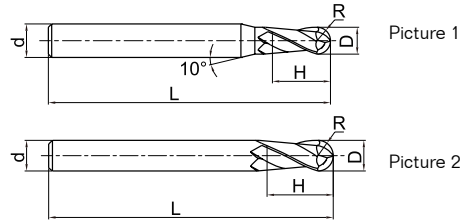

● For profile milling of Al alloy.



Ordering number	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
AL-2B-R1.0	2.0	1.0	6	4	60	2	Picture 1	●
AL-2B-R1.5	3.0	1.5	6	6	60	2	Picture 1	●
AL-2B-R2.0	4.0	2.0	6	8	60	2	Picture 1	●
AL-2B-R2.5	5.0	2.5	6	10	60	2	Picture 1	●
AL-2B-R3.0	6.0	3.0	6	12	60	2	Picture 2	●
AL-2B-R4.0	8.0	4.0	8	16	75	2	Picture 2	●
AL-2B-R5.0	10.0	5.0	10	20	75	2	Picture 2	●
AL-2B-R6.0	12.0	6.0	12	24	75	2	Picture 2	●

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

AL series

Applicable workpiece material table ● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
								●			

Code key **B213**

Graphics category and identification **B214**

Cutting parameters **B427**


B MILLING Solid Carbide End Mills

AL series for machining aluminum


3-flute flattened end mills with straight shank and corrugated edges



AL-3W



- For rough machining of Al alloy.



$D \leq 6$	$0 \sim 0.048$	$6 < D \leq 10$	$0 \sim 0.058$
$10 < D \leq 18$	$0 \sim 0.07$	$18 < D$	$0 \sim 0.084$



Ordering number	Basic dimension(mm)				Number of teeth Z	Stock
	D	d	H	L		
AL-3W-D6.0	6.0	6	16	50	3	●
AL-3W-D8.0	8.0	8	20	60	3	●
AL-3W-D10.0	10.0	10	25	75	3	●
AL-3W-D12.0	12.0	12	30	75	3	●
AL-3W-D16.0	16.0	16	45	100	3	●
AL-3W-D20.0	20.0	20	45	100	3	●

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

AL series



Applicable workpiece material table ●Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
								●			

Code key

B213

Graphics category and identification

B214

Cutting parameters

B428

S_M series end mills for machining of hard-to-cut materials such as stainless steel, heat-resistant alloy, etc.

- Large helical and rake angle, sharp cutting edge, unique edge geometry can retrain cutting-heat's influence on tool nose, and greatly improve wear resistance and heat resistance.
- The coating with good heat resistance can achieve stable machining even at high temperature.
- Very suitable for machining of hard-to-cut materials such as stainless steel, Ni substrate high temperature alloy, etc.



Tool type: SM-3E-D6.0

Dimensions: Ø6mm

Workpiece material: 1Cr18Ni9Ti

Rotating speed: 3700r/min (70m/min)

Feed speed 555mm/min(0.15mm/r)


Axial cutting depth: $a_p=9\text{mm}$

Radial cutting depth: $a_e=0.6\text{mm}$

Cutting style: side milling (down milling)

Cooling system: oil water emulsion

Machine tool: MIKRON UCP 1000



End mills	SM-3E-D6.0	Similar product of company A
Cutting length	100m	100m
Abrasion of peripheral edge	Even abrasion on cutting edge, value is 0.08 mm	Cutting edge is flaked fully, value is 0.135mm

Abrasion condition of peripheral edge

